

# *FX-i* *FX-iWP* Series



**A&D** ...Clearly a Better Value  
A&D Company, Limited  
<http://www.aandd.jp>

# Realizing Compact, Increasing Functions!

We have developed a Miniaturized SHS\* (Super Hybrid Sensor) to achieve a highly compact precision balance, which is 40% lighter and 47% smaller than our GF series with a 25% smaller footprint, while maintaining A&D's superior weighing functions. \*Patent Pending



**FX-120i**  
122gx1mg

**FX-200i**  
220gx1mg

**FX-300i**  
320gx1mg

**FX-1200i**  
1220gx10mg

**FX-2000i**  
2200gx10mg

**FX-3000i**  
3200gx10mg

# FX-i

**SHS**  
Super Hybrid Sensor

**888**  
VFD Display

**ACAI**  
Automatic Counting Accuracy Improvement

**GLP**

**RS-232C**

**FDC**  
Full Digital Calibration

COMPARATOR

ON

OFF

Buzzer Function

ID

LAN

ANIMAL

USB

under hook

%

SCF  
Statistical Calibration Function

## Response Indicator Function

Selectable FAST, MID or SLOW response to suit weighing environment conditions

## Comparator Function

Easy to compare weighing results by setting HI limit and LO limit to display HI, OK, LO indicator

## ACAI – Automatic Counting Accuracy Improvement

This counting function recalculates the average unit weight each time a sample is added to eliminate errors caused by variations in unit weight

## Percent Mode Function

A sample can be registered as 100% and the weight of another sample can be compared as a percentage

## ***B5 Size Footprint***

Ideal for installation and use in narrow spaces

## ***Compact SHS–1 Second Stabilization***

Quick stabilization speed with accurate weighing for better productivity

## ***Shock Absorber Function\****

The internal shock absorber protects the SHS from the adverse effects of vertical or transverse overloading. \*Patent Pending

## ***Quick USB Interface (FXi-02)***


Easy-to-use optional USB interface, **with no driver installation necessary**, for transfer of weighing data to a computer (applicable OS – Windows 98 OSR2 or later)

## ***SCF–Statistical Calculation Function***

Can display and/or output statistical calculation data as No. (number of data), SUM (total), MAX (maximum), MIN (minimum), R [range (maximum – minimum)], AVE (average), SD (standard deviation) and CV (coefficient of variation)

## ***LAN–Ethernet Interface (FXi-08) with WinCT-Plus Software***

WinCT-Plus software makes it possible for the user to easily set up an IP address, subnet mask etc. The user can also send commands for control and acquisition of data from multiple FX-i balances.

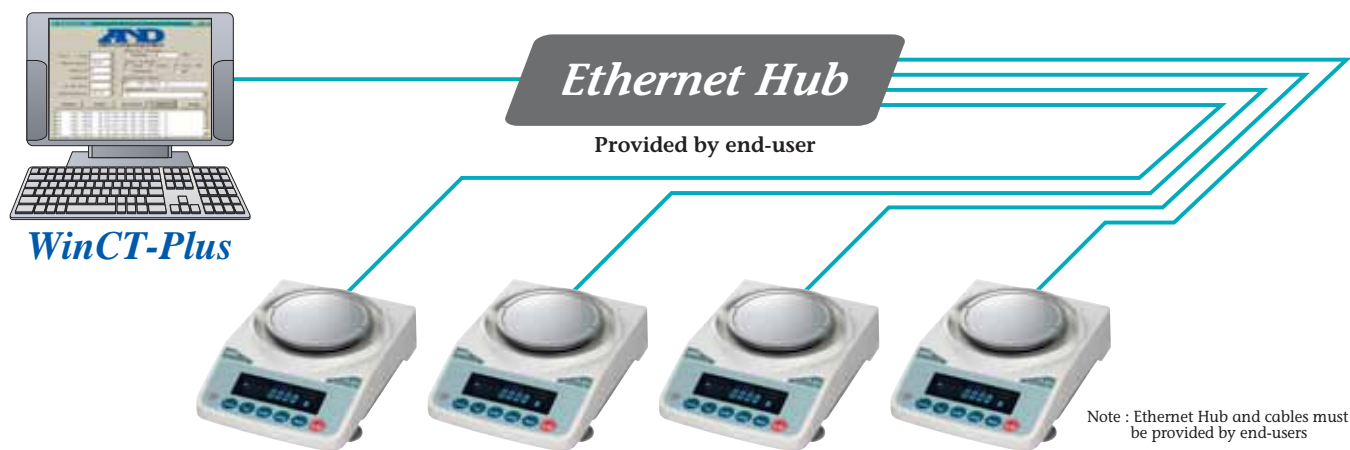

### **Animal Weighing Function**

The HOLD function enables freezing of weighing data for animal weighing applications and an ANIMAL indicator appears on the display

### **Standard RS-232C Interface**

Incorporates bi-directional communication with a PC, printer or other peripheral devices

### **Underhook**

The underhook, for hanging applications, allows for measurement of magnetic materials and density measurements in air and water

### **Multiple Weighing Units of Measurement**

Programmable or standard weighing units of measurement can be selected; g, pcs, %, oz, lb, L oz, oz, ct, mom, dwt, GN, tl, tol, mes and MLT

# *The World's First IP65 Compliant, Water / Dust Proof Precision (1mg) Balance!*

*Yet another breakthrough from A&D enabling the measurement of liquid or powder at 1mg resolution, eliminating any worries about damage to the balance*



**FX-120iWP**  
122gx1mg

**FX-200iWP**  
220gx1mg

**FX-300iWP**  
320gx1mg

**FX-1200iWP**  
1220gx10mg

**FX-2000iWP**  
2200gx10mg

**FX-3000iWP**  
3200gx10mg

# FX-iWP

**SHS**  
Super Hybrid Sensor

**888**  
VFD Display

**44A**  
Anti-static Coating  
Accuracy Approximation

**GLP**

**RS-232C**

**FDC**  
Full Digital Calibration

**COMPARATOR**

**ON/OFF**

**OFF**

**Buzzer Function**

**ID**

**LAN**

**ANIMAL**

**USB**

**under heat**

**SCF**

**IP65**

## **GLP/GMP/GCP/ISO Compliant**

In accordance with GLP and LIMS regulations, the balance ID number and calibration data can be printed out using A&D's AD-8121B or a PC

## **Auto Power OFF Function**

The display switches OFF automatically when the balance is inactive for 10 minutes as a power-saving tool

## **Auto Power ON Function**

The weighing mode display activates automatically with AC power so there is no need to press the ON/OFF key

## **Built-in Rechargeable Battery (FXi-09)\***

An optional Ni-MH rechargeable battery pack can be fitted into the FX-i series for use without AC power and for mobile applications (10 hours charging time for 8 hours operation)

\* Not IP65 compliant when used with FX-iWP





*Highly Visible Display*



*Firmly Sealed Pan Support*



*Water Proof RS-232C Cable (optional)*



*Large Breeze Break (optional)*

The small breeze break comes as standard with the FX-120i(WP), FX-200i(WP) and FX-300i(WP), which are all 1mg resolution models.

## Specifications

Specifications		FX-120i FX-120iWP	FX-200i FX-200iWP	FX-300i FX-300iWP	FX-1200i FX-1200iWP	FX-2000i FX-2000iWP	FX-3000i FX-3000iWP
Weighing capacity		122g	220g	320g	1220g	2200g	3200g
Minimum weighing value		0.001g				0.01g	
Counting mode	Minimum unit mass	0.001g				0.01g	
	Number of samples	5, 10, 25, 50 or 100 pieces					
Percent mode	Minimum 100% reference mass	0.001g			1.00g		
	Minimum 100% display	0.01%, 0.1%, 1% (depends on the reference mass stored)					
Repeatability (Standard Deviation)		0.001g			0.01g		
Linearity		±0.002g			±0.02g		
Stabilization time (typically set at FAST)		Approx. 1 second					
Sensitivity drift (10°C to 30°C)		±2ppm /°C					
Operating temperature		5°C to 40°C (41°F to 104°F), 85%RH or less (no condensation)					
Display type		Vacuum Fluorescent Display (VFD)					
Display refresh rate		5 times /second, 10 times /second or 20 times /second					
Standard serial interface		RS-232C Interface					
Weighing pan (diameter)		130mm			150mm		
External calibration mass		100g	200g	300g	1000g	2000g	3000g
		50g	100g	200g	500g	1000g	2000g
				100g			1000g
AC adaptor		Confirm that the adaptor type is correct for the local voltage and power receptacle					
Power consumption		Approx. 11VA (supplied to the AC adaptor)					
External dimensions		193 (W) X 262.5 (D) X 85.5 (H) mm					
Net weight		FX- <i>i</i> Approx. 2.5kg / FX- <i>i</i> WP Approx. 2.7kg					

## Options

- FXi-02\*** Quick USB interface with cable
- FXi-08\*** Ethernet interface with WinCT-Plus software
- FXi-09\*** Built-in rechargeable battery
- FXi-10** Small breeze break
- FXi-11** Large breeze break
- FXi-WP-10** Small breeze break (gray)
- FXi-WP-11** Large breeze break (gray)
- FXi-12** Animal weighing pan
- FXi-15** Carrying case

\* FXi-02, FXi-08 and FXi-09 cannot be used at the same time.  
(Not IP65 compliant when used with FX-iWP)

## Accessories

- AD-1683** Static eliminator
- AD-8920\*** Remote display
- AD-8922\*** Remote controller
- AD-8121B\*** Compact printer
- AD-8526\*** RS/Ethernet converter
- AX-CARATPAN** Carat pan
- AX-KO2737-500-EX** Waterproof RS-232C cable (5m)

\* (Not IP65 compliant when used with FX-iWP)



AD-8121B

**A&D** ...Clearly a Better Value

**A&D Company, Limited**

3-23-14 Higashi-Ikebukuro, Toshima-ku, Tokyo 170-0013 JAPAN  
Telephone:[81](3) 5391-6132 Fax:[81](3) 5391-6148  
http://www.aandd.jp

**A&D ENGINEERING, INC.**

1756 Automation Parkway, San Jose, CA 95131 U.S.A.  
Telephone:[1](408) 263-5333 Fax:[1](408) 263-0119

**A&D MERCURY PTY. LTD.**

32 Dew Street, Thebarton, South Australia 5031 AUSTRALIA  
Telephone:[61](8) 8301-8100 Fax:[61](8) 8352-7409

**A&D INSTRUMENTS LTD.**

Unit 24/26 Blacklands Way Abingdon Business Park,  
Abingdon, Oxon OX14 1DY UNITED KINGDOM  
Telephone:[44](1235) 550420 Fax:[44](1235) 550485

**<German Sales Office>**

Große Straße 13 b 22926 Ahrensburg GERMANY  
Telephone:[49](0) 4102 459230 Fax:[49](0) 4102 459231

**A&D KOREA Limited**

Manhattan Bldg. 8F, 36-2 Yoido-dong, Youngdeungpo-gu, Seoul, KOREA  
Telephone:[82](2) 780-4101 Fax:[82](2) 782-4280

**A&D RUS CO., LTD.**

Vereyskaya str.112 Kuntsevo Block, 121357,  
Moscow, Russia  
Telephone: [7] (495) 937-33-44 Fax: [7] (495) 937-55-66

**ALYS Technologies SA**


**Labware Business Unit**

**Tel : +41 21 312 42 60**

**Fax : +41 21 312 42 61**


**labware@alys-technologies.com**

## External Dimensions (mm/inches)

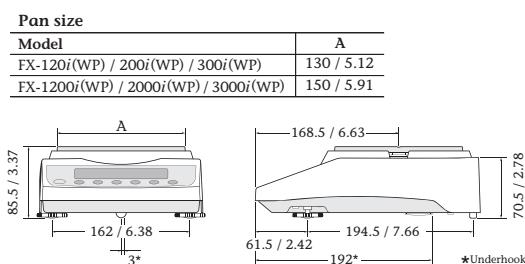

## Dimensions with Small Breeze Break (FXi-10/FXi-WP-10)

(Comes equipped with FX-120i(WP)/200i(WP)/300i(WP))

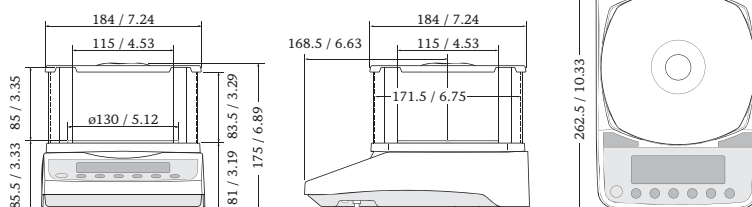

## Dimensions with Large Breeze Break (FXi-11/FXi-WP-11)

